LEED Operations versus LEED Design: The Vale Living with Lake Centre Case Study

by

Danielle Lavergne Giroux

Undergraduate Thesis

Laurentian University, 2016

Table of Contents

List of Figures ..... **iv**
List of Tables ..... **iv**
Chapter 1- Introduction and Purpose of Study **1**
1.1: Introduction 1
1.2: Ontario Regulation 397/11 – Energy Conservation and Demand Management Plans 3
1.3: Research Goal 2
Chapter 2- LEED Overview and the VLWLC **4**
2.1: Introduction 4
2.2: Overview of Green Building History in the United States and Canada 4
2.2.1: U. S Green Building Council 5
2.2.2: Canadian LEED Rating System 7
2.3: LEED Credits and Certification 8
2.4: The Vale Living with Lakes Centre 10
2.5: Green Features of the Vale Living with Lakes Centre 11
2.5.1: On Site Water Management 11
2.5.2: Energy, Heat Recovery and Passive Conservation 12
2.5.3: Building Materials Used During the Construction of the VLWLC 14
2.6: Conclusion 15
Chapter 3- The VLWLC Major LEED Systems and Performance 2013, 2014 and 2015 ..... **16**
3.1: Introduction 16
3.2: Major Heating and Cooling Systems 17
3.2.1: The Geothermal System 17
3.2.2: Energy Recovery Ventilation Systems 22
3.2.3: Efficiency of the Bedrock Based Geothermal System 23
3.3: Data 23
3.4: Conclusion 26
Chapter 4- Analysis of Actual Energy Consumption for the VLWLC, Possible Explanations **27**
4.1: Introduction 27
4.2: Overview of Analysis 27

List of Figures

Figure 2.1: VLWLC Property 10

Figure 2.2: Evacuated Tube Diagram 12

Figure 2.3: Wood siding and stone cladding shown on the Living with Lakes building 10

Figure 3.1: Demonstrates vertical geo exchange wells with one boreholes 19

Figure 3.2: Second floor or the Living with Lakes Building 20

Figure 3.3: Class room located on the main floor of the Living with Lakes Building 21

Figure 3.4: Energy Recovery Ventilation Systems 22

Figure 4.1: Overall Number of Temperature Complaints for the VLWLC 22

Figure 4.2: Amount of Money Spent Yearly Fixing the HVAC System for the VLWLC 36

List of Tables

Table 1.1: Laurentian University 2013 Energy Consumption Summary 3

Table 3.1: Characteristics of the Vale Living with Lakes Centre 24

Table 3.2: Summary of Energy and Atmosphere Category 24

Table 3.3: Energy Utilization in kWh/m^2/year 26

Table 4.1: Review of Energy Consumption for the Vale Living with Lakes Centre 33

Table 4.2: Temperature Complaints per Season 34

Chapter 1:

Introduction and Purpose of Study

1.1 Introduction

Worldwide, more than 85% of current energy needs are met using fossil fuels (Natural Resources Canada, 2012). According to the *Survey of Commercial and Institutional Energy Use Buildings 2009,* 54% of Canadian commercial and institutional buildings used natural gas as the primary energy source for space heating (Natural Resources Canada, 2012). Therefore, buildings can have a significant impact on a nation's energy consumption.

The conventional way of heating and cooling buildings using traditional methods such as steam turbines (fueled with coal, natural gas, or petroleum) are not renewable or sustainable. These fossil fuels result in the deterioration of air quality and they contribute to climate change and are, therefore, environmentally disruptive. Over the years, this has become a pressing issue and many different initiatives attempt to alleviate the impacts of using fossil fuels. Increasing

However, most buildings still operate using mostly non renewable resources and it is therefore, important to have clear policies and regulations in place in order to monitor a building's energy consumption. An example of such policies on energy is the *Ontario Regulation 397/11 – Energy Conservation and Demand Management Plans (O. Reg. 397/11)*. This regulation requires all Ontario public agencies to develop energy management plans. The agencies are obliged under the regulation to prepare, publish and submit to the Ministry of Energy their data on energy consumption and greenhouse gas (GHG) emission for year one of operation (starting January 2011-December 2011) and annually thereafter. Also, every public agency must establish and publish a detailed energy conservation and demand management plan (Government of Ontario, 2015). This initiative helps agencies understand how and where they use energy in order to develop conservation plans to guide them towards efficiency. This open data allows the agencies and the public to track energy consumption and monitor trends over the years.

Ontario universities, since they are publicly funded institutions, must adhere to this regulation and, therefore, are required to follow O. Reg. 397/11. Laurentian University in Sudbury Ontario is one of the provinces 20 publicly supported universities. It is one of six universities (Carleton, Ottawa, Nipissing, Laurentian, Algoma and Lakehead) in the northern portion of the province. In terms of 2015 student population, it ranks 16th (COCUL) and sports a total indoor floor area of 169,250 m^2 for the main campus including 2,643 m^2 for the Vale Living with Lakes Centre (VLWLC) and an additional 1,361 m^2 for its downtown School of Architecture campus. Table 1 shows Laurentian University's energy consumption from the latest report under O. Reg. 397/11 which was published in 2015 and shows the data for 2013.

Table 11 Laurentian University 2013 Energy Consumption Summary

	Electricity (kWh)	Natural Gas (GJ)	GHG Emission (Kg)	Energy Intensity (ekWh/sqft)
Laurentian University Main Campus	22,071,104	131,046	8,153,338	30.27

1.3: Research Goal

This research aims to analyze the design goals of energy usage of the VLWLC building on the Laurentian campus compared to the building's actual energy use with a focus on the energy consumption used for the building's space heating. The objective of this comparison is to identify reasons why the building is not meeting design expectations and to offer recommendations to assist other LEED designed building to have their operational results match or exceed design expectations.

Chapter two of this paper presents an overview of the history of green buildings in the United States and in Canada with a review of various energy policies that encouraged the progression of green buildings. This review is informed by articles found in peer reviewed journals and government publications. Next, chapter two will be followed by an introduction of the U.S Green Building Council and its most known rating system; LEED and lastly, it will present the VLWLC and its features that make it a green building. Since this research aims to analyze the building's energy consumption, mostly in terms of heating and cooling, chapter three describes the major heating and cooling systems that are used by the VLWLC. Chapter four establishes a method to analyze the data and assess the VLWL in terms of its operation versus it design expectations, presents the research's methodology and limitations, applies the method of investigation to the case study of the VLWLC and lastly, chapter four includes an overall critique

of the LEED rating system. To finish, chapter five consists of a brief overview of the future of green buildings as well as a short summary of the analysis.

Chapter 2:
LEED Overview and the VLWLC

2.1: Introduction

The buildings in which we live, work and play protect us, provide us with security, privacy and comfort. However, these buildings can affect our health and environment in many different ways (Torcellini & Crawley, 2006). In fact, t

government (NRDC, 2011). This paved the way for many other policies such the *Energy Policy and Conservation Act of 1975* which aimed to reduce energy demand and provide energy efficiency to Americans.

In more recent years, the *President's Blueprint for a Secure Energy Future* enacted in 2011, includes a three-part strategy aiming to first, develop and secure America's energy supplies, secondly, to provide consumers with choices to reduce costs and save energy and lastly, to offer innovative ways to a clean energy future (White House, 2011). According to the International Energy Agency (IEA), if energy efficiency policies had not been introduced 30 years ago, the global energy consumption would be 50 percent higher than actual today's consumption (Natural Resources Canada, 2009).

As the impacts of traditional buildings became more demanding in terms of high energy consumption, green buildings gained momentum. A green or sustainable building is a building designed, constructed and operated to be healthier and more resource efficient to help minimize the total environmental impacts through its entire lifecycle, from construction to renovation, operation, maintenance and demolition (Tomellini & Crawley, 2006). It was not, however, until 1993 that such buildings obtained recognition from the government in the United States (McCluskey, 2015).

2.2.1: U. S Green Building Council

Today, the U.S Green Building Council (USGBC) is at the forefront of green buildings since its

to clarify and guide Canadian projects using certain American standards but also by adapting others given geographic and climatic differences between the two countries. For Canadian projects, the ACP is then more appropriate to use then USGBC's version of the rating system. Although it is not yet entirely adapted for Canadian conditions, it offers more appropriate and realistic standards suited for Canada (CaGBC, 2009).

Lastly, the *New Construction* (NC) rating system applies to new construction as well as major renovations of both commercial and institutional buildings. It is, however, flexible enough to also apply to retail buildings, mid- and high-rise multi-unit residential buildings and other types of buildings (CaGBC, 2009). The VLWLC was evaluated according to this rating system.

2.3: LEED Credits and Certification

Each rating system is based on credits and prerequisites. In order to qualify for a CaGBC LEED certification, the prerequisites for a given rating system must be achieved. Projects earn points towards certification by meeting or exceeding each credit's requirements (CaGBC, 2009). Since the rating system used for certification of the VLWLC was the LEED Canada-NC

In the

naturally clean the water before it is filtered trough two large, green tanks of sand located in the Watershed Building then passed through a UV treatment unit. This water collection system was designed to increase water efficiency by using rainwater for toilet flushing and other non-potable purposes such as irrigation, washing of boats to clean off any potential evasive species, and so on. Due to technical reasons, the usage of this water collection system for toilet flushing is not in operation. There is no on site sewage treatment and therefore, flushed water from washroom is sent to the municipal sewage treatment plant.

Hot water used in the Living with Lakes building is provided from a high efficiency natural gas boiler. The use of this boiler will be kept at a minimal due to the use of an evacuated tube system. This concept consists of using the natural heat from the sun to warm glycol which is contained in evacuated tubes. The intensely heated glycol then pre-heats the water in a hot water tank, see figure 2 below, (Morrison, Budihardjo, Behnia, 2004).

Figure 2.2: Evacuated Tube Diagram.
Source: The Renewable Energy Hub, 2014.

2.5.2: Energy, Heat Recovery and Passive Conservation

The VLWLC also includes many heating and cooling systems that contribute to making it a green building. The major heating and cooling systems of the building will be further explained the next chapter.

One of these distinct characteristic is its energy production with geothermal heat pumps drilled 122 meters down into the bedrock beneath the parking lot of the building which provides basic space heating and cooling in both buildings. The buildings also have modern in-floor heating systems with concrete floor slabs which act as a heat reservoir to slowly release heat and warm the air above. The Living with Lakes building also has a heat recovery system which can be used during the winter. Heat is recovered from the building air in two energy recovery ventilators, one on each floor, before it makes its way out of the building. The energy recovered from this system is then used to warm the fresh air brought into the building.

The VLWLC is also equipped with passive conservation methods. The atrium in the Living with Lakes Building was designed to let escape the warm summer air that rises to the top of the atrium and once that air reaches 24 °C, louvers will automatically open, allowing warm air to exit the building and thus passively cool the building without the need of air conditioning systems. Due to technical reasons, the passive cooling provided by the atrium is not operational. However, The Living with Lakes Building has other operational passive conservation methods. Vertical sun blades installed on the windows. The blades are strategically positioned according to the direction of which the window faces to minimise the entrance of intense heating by the sun during the summer and to allow the opposite affect during the summer. The building also includes a green roof which acts as an insulator, reducing heat gains in the summer and heat losses in the winter.

Chapter 3:

The Vale Living with Lakes Centre Major LEED Systems and Performance 2013, 2014 and 2015.

3.1: Introduction

As indicated in the previous chapter, the energy requirements and the associated green house gas emissions resulting of and from construction and operating buildings of all types have major environmental repercussions. Therefore, green building techniques and standards like LEED certification have been developed recently in order to greatly reduce the environmental impact associated with building construction and operation of buildings. However, building design efficiencies are not always reflected during building operations, especially in the first years of operations.

Due to the high economic cost of energy for day to day operations and the existence of reliable data regarding the consumption of energy for the VLWLC, this case study compares the

The VLWLC was designed to meet LEED Platinum certification and to perform approximately 65% more efficiently than buildings of similar size built according to the requirements of the 1997 Model National Energy Code for Buildings (Stantec, 2012). This performance was calculated to result in energy cost savings of around a million dollars over the course of 25 years (Stantec, 2012). In order to achieve such performance, however, the design went through a number of iterations before the design team decided which elements to include. The decision to include a specific design or not was based on construction costs and the potential economic return on investment. For instance, two of the early considerations for inclusion were wind power and photovoltaic panels. These were examined and were determined not to be suitable for the project due to the lack of wind required for wind turbines and the relative inefficiency and high cost associated with photovoltaic panels. The Center however, has not ruled out the option of future usage of wind power and photovoltaic panels. Tests to determine the suitability of geothermal energy indicated less than ideal results, but the conclusion was that the amount of energy available was sufficient and geothermal energy was selected for space heating and cooling. The following sections in this chapter identify and describe the major energy using systems that were incorporated into the building.

3.2: Major Heating and Cooling Systems

3.2.1: The Geothermal System

As briefly mentioned above, a geothermal system was designed into the VLWLC given its expected superior performance to wind and solar systems. The city of Greater Sudbury, Ontario is located on the Canadian Shield at a latitude of approximately 46.5° North. The city has a humid continental climate (Köppen climate classification *Dfb*) (Hudson, 2000). As such it

has warm and often hot summers with long, cold and snowy winters. Since it is situated north of the Great Lakes it is susceptible to receiving cold air masses in the winter months (Hudson, 2000). The average increase in temperature with depth (geothermal gradient) for the study area is 12-18 °C/km, meaning that for every kilometer further down into the earth's crust, the temperature will increase of 12-18 °C (VLWLC, 2012). The geo-exchange wells of the VLWLC are 122 meters into the ground and at this depth, the rock temperature remains between 8-9 °C. This not only makes the VLWLC's geothermal system one of the first rock geothermal system of this scale in North America (VLWLC, 2012), but also one of the most efficient [4] [6] [14] [21] [22].

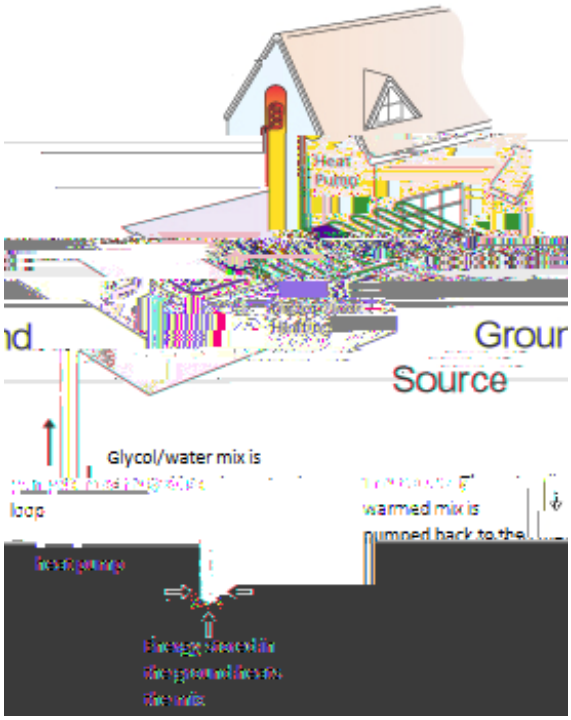

Figure 3.1: Demonstrates vertical geo-exchange wells with one boreholes (the VLWLC geo-exchange system contains 40 wells). The blue represents the glycol/water mix which circulates down the well. Once the mix circulates down the well, it is heated to about 10°C, represented by the red. It is important to note that unlike shown in this figure, the heat exchange system (heat pump) for the VLWLC is not located in a separate building. Source: Politecnico di Torino, 2016.

Once the glycol/water mix is pumped down the loops, it then makes its way to the heat exchange system which is located in the Watershed Building. When the liquid mix passes through the heat exchange system, it is compressed which raises its temperature to about 50°C. This system is similar to the operation of a common refrigerator (the coil holding compressed coolant at the back of a refrigerator is hot and radiates away energy captured from the inside of the fridge), (VLWLC, 2012). Once the heated glycol/water has passed through the heat exchange system, it transfers the accumulated heat to an in-floor "hydronic" water heater that circulates through highly durable tubing, from the heat exchanger (in the Watershed Building), then through concrete floor slabs in both buildings (See Figure 3.2). The in-floor 'hydronic' water heating then radiates heat which is absorbed and released by the concrete flooring without

large temperature fluctuations to warm the air above to allow space heating during the winter time.

Figure 3.2: Second floor or the Living with Lakes Building. The floor radiant heating tubing is installed and ready for the concrete to be poured over. Source: VLWLC 2012

In the Living with Lakes Building, the tubing in the floor slabs is installed in twelve separate zones which allow for the temperature of each zone to be controlled individually. Temperature changes are dd-ua(p)-4e(vi)6-4(bLa)-7(k)-21(e)]T6.81Tj (f)Tjaempeatviakn 0.58d(or)3(t)0

The Living with Lakes Building is broken down into 31 zones (about three offices make up a zone) where rapid air temperature changes can be achieved. This is a large box like air-vent with holes cut out which is suspended across the ceiling permitting quick temperature adjustments on both floors (See Figure 3.3). Inside the box vent, air is passed over a coiled tube in which hot or cold water has been pumped from the mechanical room in the Watershed Building. This cools or warms the air before it is expelled out of the box through the cut out holes and allows quick temperature adjustments (VLWLC, 2012).

Figure 3.3: Class room located on the main floor of the Living with Lakes Building. Showcases the "box vent" in the top left corner. Source: Obtained from Laurentian University Office of Sustainability

3.2.2: Energy Recovery Ventilation Systems

The VLWLC has three energy recovery ventilation systems, one on each floor of the Living with Lakes Building and one on the roof of the Watershed Building. These aim to reduce the waste of energy put into the air of the Living with Lakes Building by the in-floor heating system or the heating coils in the box vent.

Energy recovery ventilators consist of two separate air handling systems. The first collects and exhausts stale indoor air and the second is used to draw fresh outside air and distribute it throughout the building. The system transfers latent energy (humidity) from the most humid air current to the driest, while transferring heat. So in winter, the outside air will absorb exhaust air's humidity and in summer the reverse, see Figure 3.4 (Natural Resources Canada (a), 2015).

Figure 3.4: Energy Recovery Ventilation Systems
Source: Venmar: Clean Air Living, 2016.

The energy recovered from this system is used in two different ways, during the winter it warms the fresh air brought into the building and secondly, it is used in the process of actively warm the bedrock in the summer time.

3.2.3: Efficiency of the Bedrock Based Geothermal System

After using the heat in the bedrock over the winter and thermal cooling of the rock during the winter, it needs to be actively warmed up each summer to ensure its capability to produce a sufficient amount of energy the following winter. To assist in this process, warm glycol is circulated down the boreholes of each of the 40 wells. This process is necessary considering rock is a very poor heat conductor and since the bedrock cools down during winter time and cannot warm up enough on its own to be efficient for the geothermal system (VLWLC, 2012).

Despite this process, the summer recharge of energy is not guaranteed to be equivalent or surpass the needs of energy during the winter. In these situations, space heating will be provided by back up natural gas fired condensing boiler (Stantec, 2012).

3.3: Data

Table 3.1 highlights a few key characteristics of the VLWLC. The construction of the building was finalized in 2011 and two years later, the VLWLC underwent its first review to determine which certification the building would receive. In January of 2014, the final review took place and the building achieved a total of 53 points which earned it the LEED Canada-NC Construction v.1.0 Platinum certification.

Table 3.1: Characteristics of the Vale Living with Lakes Centre

Gross Floor Area (m^2)	Year of Completion	First Review Date for Certification	Final Review Date for Certification	LEED Energy and Atmosphere points earned	LEED Total Points Earned	
2,643 m^2	2011	June 2013	January 2014	12 (out of a possible 17 points)	53	

Under the LEED Energy and Atmosphere category, the VLWLC achieved a total of 12 points out of a possible 17. The most significant credit under this category is credit number one which has 10 points available and aims to optimize energy performance shown below in Tthrfo5(6 4 Ttnc)-

Credit 4	Ozone Protectior	REVIEW The applicant has submitted the signed LEED letter template declaring that the HVAC&R systems used in the project are free of HCFC's.	1 Point
Credit 5	Measurement & Verification	Credit Not Attempted	0 Points
Credit 6	Green Power	The applicant has submitted the signed LEED letter template declaring that the project has purchased 50% of the project's annual regulated electricity load in renewable power certificates for a period of two years. The applicant has also submitted a copy of the contract between the Owner and Renewable Choice for 425,668 kWh of renewable energy certificates.	1 Point

A baseline modeled building was chosen as a reference standard for the proposed design (VLWLC) to help determine the energy consumption, the Model National Energy Code for Buildings, (MNECB) was chosen to help make the evaluation. A comparison between the reference building (located in North Bay, Ontario), and the VLWLC design is presented in Table 3.3

Table 3.2 shows the energy utilization in kWh/m^2/year for the reference building (MNECB), the proposed building and the average of the VLWLC's consumption for 2013, 2014 and 2015.

Table 3.3:Energy Utilization in kWh/m^2/year

	Reference Building (MNECB)	Proposed/Design VLWLC	Actual VLWLC (Average of 2013, 2014, 2015)
Plug Loads	14	14	8.7%
Domestic Hot Water - Electric	0	0	0
Domestic Hot Water - Gas	20	17	10.5%
Fans	46	33	20.1%
Pumps	62	4	2.5%
Cooling	18	3	1.9%
Heating-Gas	0	42	26.1%
Heating-Electricity	287	25	15.5%
Lighting			

Chapter 4:

Analysis of Actual Energy Consumption for the Vale Living with Lakes Centre and Possible Explanations

4.1: Introduction

As mentioned above, even though green buildings and standards such as the LEED certification are designed to lower energy consumption and, as a result, also reduced relate emissions of green house gases, the actual rates of consumption and emissions do not always reflect the projections of the proposed design. In reality, certain factors affect the actual energy consumption thereby resulting in different rates of energy than anticipated. This Chapter discusses some of the possible reasons why the VLWLC's energy consumption during its first three full years of operation vary from the predicted usage.

4.2: Overview of Analysis

Even though the VLWLC opened in 2011, only the last three years are important to this study because it was not until 2013 that the Centre became completely operational and fully occupied. Therefore, the building's energy consumption of 2013, 2014 and 2015 are used to assess the building's design for energy efficiency. Having more than one year of energy data allows for the comparison of differences and similarities between the systems' energy consumption patterns and the design efficiencies. In addition, it allows for a better evaluation of potential weather and occupancy fluctuations between years.

The number of people who are assigned permanent space in the building has varied over the study period. Therefore, in addition to calculating the overall energy use for the VLWLC complex, the Centre's occupancy data for 2013 and 2014 are available and allow to calculate the per capita energy use. This per capita energy use lends further understanding to the variation in energy use between years. Local climatic records for 2013, 2014 and 2015 were also studied to provide a better understanding of the geothermal system therefore possibly explain certain fluctuations in the energy consumption and to further the analysis of the work orders.

In addition, data exists outlining the number of work orders initiated and completed with respect to the operation of the heating and cooling systems. This data is categorized by season for each year during the study period and trends are identified. These trends are also used as a means to assess the effectiveness of the geothermal system and the general comfort of the building's occupants. However, before undertaking this analysis, the Centre's energy consumption for the study period is presented.

4.3: Actual Energy Consumption Data

As mentioned in the previous chapter, during the design of the geothermal system it was expected that there would be need for back up heating at particular times of the year, and if and when, ambient temperatures for extended periods of time overtaxed the geothermal system. Natural gas is used for heating water for use in the Centre and for back up space heating. Therefore, all other energy needs are met by using electricity: lighting, plug loads, operating the HVAC system, and so on.

4.4: Methodology and Data Limitation

All assumptions made are based from available data and findings in similar case studies. For the purpose of this study, only the energy consumption of the VLWC will be examined. All of the data used for the analysis was provided by the Laurentian University Office of Sustainability including actual annual energy consumption, summary of annual maintenance Work Ordum.>8

(ekWh from
m^3

consumption for 2013 is 16.6 % for 23 occupants.

In 2014, the consumption of natural gas is slightly lower than the consumption in 2013 with an increase in electricity usage. The local climatic records reveal that 2014 was the coldest year out of the three years used for the study period with a yearly average of 2.6 ˚C and a Winter (January, February and December) average temperature of -12.2 ˚C. The yearly average for 2013 was 3.3 ˚C and -12.5 ˚C during the Winter while the yearly temperature average in 2015 was 3.9 ˚C and -12.3 during the Winter. Therefore, this increases the need for space heating and could explain the slight increase in the electricity consumption from 2013 to 2014 while maintaining a natural gas relatively at the same consumption of 2013. The per capita energy consumption for 2014 was 11.6 % for 33 occupants which represents a reduction of 5% despite the 10 additional occupa cr 33 o4o-2(nc[n(a)4(m)2(r)-7(g(nc)4(10(e)w)2(e)4(oa)4(i)-2(n t))-7(o)4(i)-2(n consupanption in th-30 Tw -6.57 h reptuentio rg4(10(e)w)enof 20i-11(e)4(ntho)-2((e)4v2(n nt)-, dot)-2(

Over the course of the three years analyzed, the natural gas consumption steadily decreases while the electricity consumption increases. This occurrence could support the assumption above, backing up the idea that the geothermal system's efficiency reflects the type and amount of energy used. This means that the reduction of natural gas consumption could possibly represent that the system is becoming more efficient over time thus requiring less back up space heating produced by natural gas and since the geothermal system runs on electricity, increasing its usage.

Also, the energy use intensity calculated decreases from one year to the other. Despite that the reduction is not substantial, it nonetheless represents a reduction in the VLWLC's overall energy consumption. This could support the idea that the system's efficiency required

Figure4.1 Overall Number of Temperature Complaints for the Vale Living with Lakes Centre

Out of all three years, 2013 represents the year with the least number of complaints for both hot and cold temperatures. There are two possible explanations for this. The first explanation being that the geothermal system was very efficient for that year and the second explanation, the more likely one, that the occupants of the building were not familiar with how the building would operate. Overall, warm temperature complaints are more frequent then cold tempm te -0.049Sa(a)6(4(i)4(2)-ms)-58u1(m3(a)6(k)-2r1-1(e m)-64()-2r1-1(e m)-io)1.9(n(gu)-20(r)-7(e

Spring and Fall then in Summer and Winter. As discussed in Chapter 3, this supports the notion that the geothermal system does not quickly respond to the variability in temperatures of the Spring and Fall.

Table 4.2 Temperature Complaints per Season

	2013	2014	2015	Total

specifying that the temperature was approximately 27 ˚C at the time of the complaint. Also, there were four warm temperature complaints filed during the Fall again, indicating very warm temperatures. The only cold temperature complaint was filed during the Fall, indicating that the temperature was at 14 ˚C, just days after a warm temperature complaint was om rt t T M

Winter, another during the Summer and the other four during the Fall. For the warm temperature complaints, a few comments mention the in floor hydronic heating system. Many comments for the cold temperature complaints made in 2015 mentioned that there was continuous cold air blowing out of the box shaped air vent in the Living with Lakes Building. This makes it evident that the system is over working itself and, again, supports the idea of there being inefficiencies in the HVAC system, in this case, the rapid air temperature change system.

refrain from opening windows, report all malfunctions in the system and so on. The second conclusion suggest that it might require the system a few years of operation to be able to regulate itself to its proposed design efficiency goals. Based on the information gathered for this case study, it is believed that for the VLWLC, a combination of both conclusions took place which improved the building's overall energy consumption. Green buildings and buildings with a LEED certification operate differently than traditional buildings, therefore, how they operate is not commonly known or yet understood. This assumption is supported by an American case study done by the University of California in 2006 which investigated the energy consumption of 21 buildings with various LEED certifications. Amongst the many conclusions made by the study, the authors emphasis that the occupants of the building must work with the building, and not against it, to ensure maximum efficiency. (Diamond, 2006)

4.6: LEED Critiques and recommendations

Standards such as LEED and other similar standards and rating systems to evaluate green buildings are essential to further the advancement of green buildings and help the transition towards more sustainable buildings and homes. However, as it currently stands, there are a lot of areas in which LEED standards and criteria could be modified to improve the overall efficiency of LEED designed buildings.

show a true representation of the building's consumption's such as energy or water usage since the building is not fully occupied.

Also, LEED's evaluation to determine the level of certification a building received does not take into consideration possible breakdowns or inefficiencies the building's green features might experience after the evaluation is done. Some of these green features possibly played a crucial role in the its certification. For example, in the *Water Efficiency* category, all five credits in this category, (each worth one point) focus on water use reduction and on site water management. Therefore, if the systems and techniques used to reduce water usage and manage water on site are properly functioning during the building's final review, the building will earn the associated points which will contribute to its certification. However, if the building experiences issues with these systems or techniques at any point after they received their certification, they may choose to stop using them without losing their certification. This is highly beneficial for a building since it increases its chances to potentially earn and maintain a higher level of certification than it might deserve. To adjust this, including a post occupancy evaluation of the building, perhaps a year or two after it becomes fully functional and fully operational would better reflect its sustainability and give a better understanding of the building, including which areas to improve and so on.

The overall goal of LEED is to certify buildings which aims to reflect in lower environmental impacts. However, the system is a 'point hunting' approach meaning that it is not designed to have the largest positive impacts but rather to award the most points to a building to encourage certification. For example, in addition to having no post occupancy evaluation which supports this assumption, breakdown of points associated with each credit are not equally assigned between various options. For example, in the *Energy and Atmosphere* category, a total

of 17 points can be awarded where 10 of those 17 points can be earned in one credit if a building achieves an

many factors that can modify a building's energy consumption from year to year. Many other similar case studies demonstrate that these new technologies which often used in buildings with a LEED certification require more than one year to perform to the predicted standards. The VLWLC case study is no exception since the geothermal system as well as the in floor hydronic system seem to have worked through the initial issues and the building's EIU is slowly decreasing. Also, the geothermal system used to provide the majority of the space heating for the VLWLC is designed to be adaptable to the changing climates which will therefore increase its efficiency overtime.

Chapter 5:

Conclusions and Implications

Green buildings are still relatively new to the construction sector and only earned recognition from governments about 25 years ago (McCluskey, 2015). They are therefore still at the beginning of their development phase and are slowly being introduced to communities.

Many of the techniques and technologies used for the construction or retrofit of these green buildings are still being developed and / or perfected which makes their application challenging. Also, there are not many workers that are specifically trained to work with green technologies or systems which make it difficult for such technologies or systems to be properly installed to reduce potential future issues, to maintain and take care of these systems or to repair them in the event of a breakdown (GhaffarianHoseini, Dahlan, Berardi, GhaffarianHoseini, Makaremi, & GhaffarianHoseini). For example, in the case of the VLWLC, the system was designed to use rainwater for toilet flushing and other non potable uses is currently not in operation and so, the Centre uses the conventional municipal system. Likewise, our understanding of how green buildings' daily, seasonally, and yearly operation is currently limited since they are still new and being developed. However, with every new green building, we are able to document the efficiency of the green systems, techniques or technologies that were used, analyse them and determine ways to optimize these systems to apply them to future green buildings or incorporate them into the operation of existing green building to increase their efficiency (Diamond, 2006). As years progress, these systems and green features will be perfected and standardized which will not only make green buildings more efficient, predictable

and reliable but will also make them more appealing to the general public and thus, will make green building more common.

Natural Resources Canada (b). (2015). Energy Efficiency in Buildings. Retrieved March 22, 2016, from https://www.nrcan.gc.ca/energy/publications/efficiency/buildings/5985

Natural Resources Defense Council (NRDC). (2011). Environmental Laws and Treaties. Retrieved November 27, 2015, from http://www.nrdc.org/reference/laws.asp

Politecnico di Torino. (2016). Groundwater Engineering. Retrieved March 3, 2016, from http://areeweb.polito.it/ricerca/groundwater/ricerca/geothermics.html

Stantec. (2012). Living with Lakes Centre Energy Modeling Report.

The Renewable Energy Hub. (2014). How do solar thermal panels work? Retrieved April 15, 2016, from https://www.renewableenergyhub.co.uk/how-do-solar-thermal-panels-work.html

Torcellini, P., & Crawley, D. (2006). Understanding Zero-Energy Buildings. *ASHRAE Journal*, *48*(9), 62–69.

United Nations Environment Programme. (2009). Buildings and Climate Change: Summary for Decision-Makers. Retrieved from http://www.unep.org/sbci/pdfs/SBCI-BCCSummary.pdf

USGBC. (2013). LEED User Guide. Retrieved from http://www.cabrillo.edu/~msoik/3/LEED%20v4%20guide.pdf

USGBC (a). (2015). Our History. Retrieved November 28, 2015, from http://www.usgbc.org/about/history

USGBC (b). (2015). LEED Overview. Retrieved November 28, 2015, from http://www.usgbc.org/leed

Vale Living with Lakes Centre. (2012). Being Green and Living up to it.

Vale Living with Lakes Centre. (2014). Our Staff. Retrieved April 18, 2016, from http://www3.laurentian.ca/livingwithlakes/about/staff/

Venmar: Clean Air Living. (2016). HRV and ERV -Why choose a ERV (Energy Recovery Ventilator). Retrieved April 17, 2016, from http://www.venmar.ca/en/air-advice/hrv-and-erv-why-choose-a-erv-energy-recovery-ventilator.html

Washington State Department of Ecology. (2006). Green Building Law. Retrieved April 20th, 2016, from http://www.ecy.wa.gov/programs/swfa/greenbuilding/law.html

White House. (2011). Blueprint for a Secure Energy Future. Retrieved from https://www.whitehouse.gov/sites/default/files/blueprint_secure_energy_future.